


Lashing str.PS clamp buckle 3m, 250daN WorkMo

Material no.: 1000005222 | Matchcode: PSH KS 3 WO | EAN code: 4045294525187

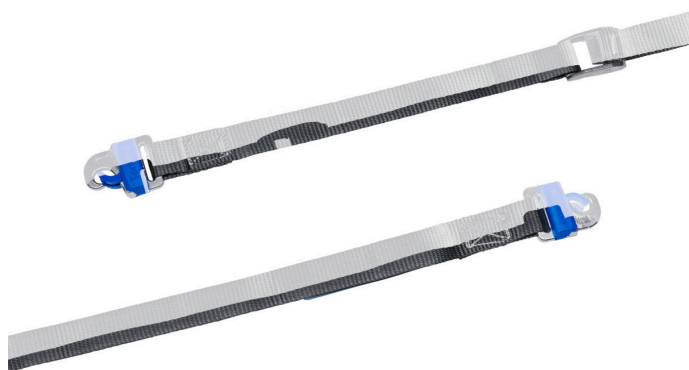

- » Total length 3 m
- » strap width of 25 mm
- » quicker access to freight
- » universally applicable in vehicles
- » enables flexible load securing

Materials & Colour

Material:	PA6 Polyester Steel
Colour:	Anthracite

Dimensions

External dimensions:	3.000 x 39 x 19 mm
Length in mm:	3000

Technical details

Weight:	0,24 kg
Maximum tensile force in daN:	250

Accessories

	Material no.	Description	Matchcode	EAN code
--	--------------	-------------	-----------	----------



1000001736	ProSafe individual lashing point restraint pole	EZ S PS	4045294228040
------------	---	---------	---------------

Lashing str.PS clamp buckle 3m, 250daN WorkMo

Material no.: 1000005222 | Matchcode: PSH KS 3 WO | EAN code: 4045294525187

	Material no.	Description	Matchcode	EAN code
	1000001870	Flexible edge protection lash.straps(4x)	ZFKS ZG VPE4	4045294230999
	1000003736	ProSafe CargoStopp	CST PS	4045294403072
	6000001231	ProSafe individual lashing point	EZ PS	4045294224646
	6000001259	ProSafe floor lashing point	BZ PS S	4045294225179
	6000001260	ProSafe floor lashing point restraint pole	BZ SP PS	4045294225186
	6000001116	Anti-rattle mat 750x500	ARM 750X500	4045294239565

Description

The ProSafe lashing belt with clamp buckle and a length of 3 m (2.20 m loose end / 0.80 m fixed end) can be universally deployed in the vehicle to secure light transport goods, and intuitively operated with one hand. It is compatible with ProSafe uprights from the Sortimo Globelyst van racking system, ProSafe rails, SoboGrip ProSafe floors, single lashing points, restraint poles with single lashing points as well as with the vehicle manufacturers' original lashing points. The lashing belt has a bearing load of up to 250 daN and a width of 25 mm. The anti-rattle mat that can be cut (art. no.: 6000003365) also prevents the load from sliding. When it comes to payload with sharp edges, an edge protection profile should be used to protect the lashing belt and the load.

We reserve the right to make changes in the interest of technical progress, as well as correcting printing errors and mistakes. Pictures are similar, decorative material not included. With the publication of this data sheet, previous editions lose their validity. Version: 29.02.2024