


## ProSafe Load securing net 775x1025mm

Material no.: 1000004935 | Matchcode: LASIN PS 775X1025 | EAN code: 4045294515805

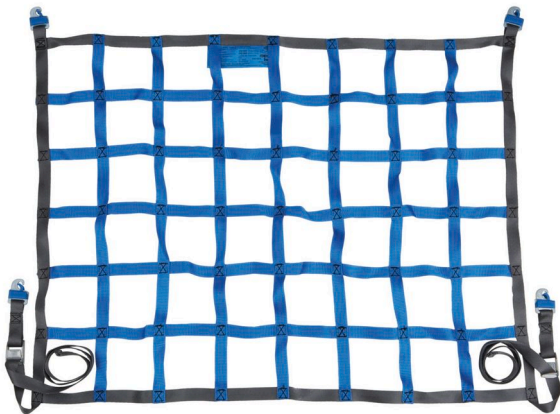

- » Ideal for loads that are difficult to secure, odd-shaped or round
- » Extremely sturdy and tear-resistant
- » Mesh size 100mm, strap width 25mm
- » Two lashing straps with a clamping lock
- » Tested and certified by DEKRA

### Materials & Colour

Colour: Sortimo Blue, Sortimo CoolGrey

### Dimensions

External dimensions: 775 x 1.025 x 50 mm

Length in mm: 775x1025

### Technical details

Weight: 0,70 kg

Maximum tensile force in daN: 200

## ProSafe Load securing net 775x1025mm

Material no.: 1000004935 | Matchcode: LASIN PS 775X1025 | EAN code: 4045294515805

### Description

The ProSafe load securing net secures your valuable freight and is especially ideal for hard to secure, irregular or even loads. Thanks to the ProSafe System, the net can be hooked onto the ProSafe interfaces of the Sortimo SR4 and Globelyst4 van racking systems, to ProSafe lashing rails, to the SoboGrip ProSafe floor or even to the vehicle's original lashing points.

The net is extremely sturdy, tear-resistant and is made from high-quality materials, ensuring a very long service life. The mesh size is approx. 100 mm with a strap width of 25 mm. There are two lashing straps with a clamp buckle on the net.

The quality and functionality of the load securing net have been tested and certified by Dekra in compliance with regulation VDI 2700 sheet 3.3. The load capacity of up to 400 daN has been checked by Dekra as part of the certification. You can therefore rely on being able to use the ProSafe load securing net for a long time to come. And what is more, thanks to the flexibility of the ProSafe system you also save a lot of time when securing your load.

We reserve the right to make changes in the interest of technical progress, as well as correcting printing errors and mistakes. Pictures are similar, decorative material not included. With the publication of this data sheet, previous editions lose their validity. Version: 12.08.2025